



**PROJECT REPORT
ON
PERIMETER AND DETAILING SURVEY OF
PART OF KWARA STATE POLYTECHNIC, ILORIN.
FROM ENGINEERING BUILDING TO GTBANK**

**BY
AREMU OLUWASAYO AYOKUNLE
ND23/SGI/FT/0040**

**SUBMITTED TO:
THE DEPARTMENT OF SURVEYING AND GEO
INFORMATICS KWARA STATE POLYTECHNIC, ILORIN.**

**IN PARTIAL FULFILMENT OF THE REQUIREMENTS FOR
THE AWARD OF NATIONAL DIPLOMA IN SURVEYING
AND
GEO-INFORMATICS**

JULY, 2025

CERTIFICATE

I, **AREMU OLUWASAYO AYOKUNLE** with Matric Number **ND/23/SGI/FT/0040** hereby certify that the information contained in this project report were obtained as a result of observations and movements taken by me and the Perimeter and Detailing was done in accordance to Surveying rules and regulations and Departmental instructions.

Signature of student:

Name of student:

Date of completion:

Matric Number:

ND/23/SGI/FT/0040

CERTIFICATION

This is to certify that **AREMU OLUWASAYO AYOKUNLE** with Matric number **ND/23/SOI/FT/040** from department of surveying and Geo-informatics, Institute of Environment Studies carried out a practical field work which formed basic of the project in accordance with survey rules and regulations and departmental instruction.

SURV. R. O. ASOINIBARE
MRS. S.O. ADEOTI
(Project supervisor)

DATE

SURV. AWOLEYE RAPHAEL
(Project Coordinator)

DATE

SURV. AMBIMBOLA ISAU
Head of Department

DATE

J.O OPALEYE
External Moderator

DATE

DEDICATION

This project is dedicated to Almighty God and my lovely partner MR AND MRS AREMU who saw mw through the programme.

ACKNOWLEDGEMENTS

All glory honor adoration to God Almighty, the gracious one who has given me the opportunity complete my ND programmed. My appreciation goes to my supervisors' MRS.S.O ADEOTI For their encouragement and motivation as regard the writing of the project thank you and God bless you. And to all lecturers in the department of surveying and Geo informatics, Surv. Ambibola, Surv. Banji, Surv, Diran, Surv. Kabiru, Surv. Kazeem and others May God bless you all (Amen).

I also express my sincere gratitude to my wonderful parents Mr. and Mrs. AREMU for their financial morals support toward the competition of this program. You will reap the fruit of your labour (Amen).

TABLE OF CONTENTS

| | |
|-------------------------------------|-----|
| TITLE PAGE | i |
| CERTIFICATION | ii |
| DEDICATION | iii |
| ACKNOWLEDGEMENT | iv |
| ABSTRACT | v |
| LIST OF FIGURES | vi |
| TABLE OF CONTENT | vii |
| CHAPTER ONE | |
| 1.0 INTRODUCTION | 1 |
| 1.1 BACKGROUND OF THE STUDY | 1 |
| 1.2 STATEMENT OF THE PROBLEM | 7 |
| 1.3 STUDY AREA | 8 |
| 1.4 AIM OF OBJECTIVE OF THE PROJECT | 9 |
| 1.4.1 AIMS | 9 |
| 1.4.2 OBJECTIVE | 9 |
| 1.5 SCOPE OF THE PROJECT | 10 |

| | | |
|----------------------|--|----|
| 1.6 | SIGNIFICANCE OF THE PROJECT | 10 |
| 1.7 | PERSONNEL | 11 |
| CHAPTER TWO | | |
| 2.0 | LITEATURE REVIEW | 12 |
| CHAPTER THREE | | |
| 2 | METHODOLOGY | 20 |
| 3.1 | RECONNAISSANCE | 21 |
| 3.1.1 | OFFICE RECONAISSANCE | 21 |
| 3.1.2 | FIELD RECONNAISSANCE | 21 |
| 3.2 | MONUMENTATION | 23 |
| 3.3 | EQUIPMENT USED | 24 |
| 3.3.1 | PERIMETER SURVEY AND DETAILING OBSERVATION | 24 |
| 3.3.1.1 | TEST OF INSTRUMENT | 25 |
| 3.4 | COLIMATION TEST FOR TOTAL STATION | 25 |
| 3.5 | DATA ACQUISITION | 26 |
| 3.5.1 | GEOMETRIC DATA ACQUISITION OF PERIMETER | 27 |

| | | |
|---------------------|---|-------|
| 3.5.2 | GEOMETRIC DATA ACQUISITION OF DETAILING | 27 |
| 3.6 | PERIMETER TRAVERSING | 28 |
| 3.7 | DATA DOWNLOADING | 29 |
| 3.7.1 | DATA PROCESSING | 33 |
| 3.8 | COMPUTATION | 33 |
| 3.8.1 | TRAVERSE BACKWARD COMPUTATION | 34 |
| 3.9 | AREA COMPUTATION | 34 |
| 3.9.1 | LINEAR ACCURACY | 35 |
| CHAPTER FOUR | | |
| 4.0 | RESULTS | 36 |
| 4.1 | CONTROL ESTABLISHMENT RESULTS | 36 |
| 4.1.1 | CONTROL ESTABLISHED | 36 |
| 4.4.2 | TEST OF INSTRUMENT | 36 |
| 4.2 | TEST OBSERVATIONS | 37 |
| 4.3 | CONTROL CHECK | |
| | (COMPUTED VALUE AND OBSERVED VALUE) | 37-38 |

| | | |
|-------------------------|---|----|
| 4.4 | TRAVERSE BACK COMPUTATION | 38 |
| 4.5 | RESULTS OF THE AREA COMPUTATION | 39 |
| 4.6 | RESULTS OF LINEAR ACCURACY | 40 |
| 4.7 | DATA ANALYSIS | 40 |
| 4.7.1 | THE PERIMETER BOUNDARY POINTS | 41 |
| 4.8 | INFORMATION PRESENTATION | 41 |
| CHAPTER FIVE | | |
| 5.0 | SUMMARY, CONCLUSION AND RECOMMENDATIONS | 44 |
| 5.1 | SUMMARY | 44 |
| 5.2 | PROBLEM ENCOUNTERS | 44 |
| 5.3 | CONCLUSION | 45 |
| 5.4 | RECOMMENDATIONS | 45 |
| | REFERENCES | 47 |
| | APPENDIX | 48 |

LIST OF TABLES

1. Record of coordinates points
2. Reading obtained during instrument test
3. Back computation of the coordinates

ABSTRACT

This project report focused on various methods used in exclusion of perimeter and detail survey, part of Kwara State Polytechnic, Ilorin, From Engineering building to GTBANK. The project was carried out using the basic survey operation include reconnaissance which involves filed and office reconnaissance survey, followed by data acquisition which involves third order theodolite traversing, total station for detailing, but we use total station. All the data acquired from the field were deduced, computed and adjusted according to specification and result were analyzed and found to be within the expected accuracy. Finally computed data were presented in graphical form in digital using Civil CAD software and a comprehensive report on how the whole operation was carried out was finally written.

CHAPTER ONE:

Background to the study

Land is a solid part of earth's surface. It is the foundation of all forms of humanity activity. It is man's most valuable resources which out which man could never existed and on which his continued existence and progress depend. (Adeoye, 1998). It is the source of all material wealth it be food, clothing, fuel, shelter, metal or precious stone. It is scarce natural, resources, which has been regarded as a measure of status and power, from time immemorial. Any development activity is nearly impossible to conceive without ranking land into consideration.

In surveying, Perimeter is the total length of the boundary lines that define the outer edges of a specific land area or property. It is measured using surveying tools to ensure accuracy. Determining the perimeter is crucial for land documentation, legal ownership, construction planning, and resolving boundary-related issues or disputes. While detailing refers to the process of accurately measuring and recording the physical features within a surveyed area. This includes both natural and man-made objects such as trees, buildings, roads, fences, and utility lines. Detailing helps in producing detailed site plans or maps, which are essential for planning, design, and construction purposes. It ensures that all relevant features are represented with precise positions and dimensions, allowing engineers, architects,

and planners to make informed decisions. Detailing is usually done after perimeter survey and involves the use of instruments like total stations, GPS, or measuring tapes, depending on the project requirements.

Surveying is a profession with many definitions as applied to it over the years, changing even as the duties of the surveyor had been dynamic over the years. Some years back surveying was defined as the science and art of making reliable measurements of the relief position of features on, above or beneath the earth surface and plotting of these measurements to some suitable scale to form a map, plan or chart (Brinker 1977).

Surveying is the first step for the execution of a construction projects. With the change in time, there has been great development and improvement in the surveying techniques. From the vintage chain surveying to satellite surveying and the modern engineering projects, construction has reached a new modern era of engineering.

Surveying is the branch of engineering that deals with the art and science of determining the relative positions of distinctive features on or beneath the surface of the earth, by measurements of distances, directions and elevations (Agor 2008). There are different branches of surveying such as Geodetic survey, Topographic

survey, Hydrographic survey, Mining survey, Photogrammetry and remote sensing, Engineering survey, Cadastral survey which include perimeter and detail survey.

Cadastral surveying is the sub field of cadastre and surveying that specializes in the establishment and re-establishment of real property boundaries.

Cadastral survey is the branch of surveying which is concerned with the survey and demarcation of land for the purpose of defining parcels of land for registration in the land registry. It is concerned with land management and more specifically with issues of landownership, measurement delineation of property boundaries. It is survey that creates, mark, define or re-establish the boundaries and subdivision of public land and through this, ownership can be recorded in public register.

Perimeter surveying is a type of property survey that determines the particular boundaries of a parcel of land areas by setting corner markers or monuments, to determine coordinates of these corners, and to obtain boundary and area information required for record, deed descriptions and for plotting parcels of real property. These markers are desirable for public record and to ensure correct title for the rightful owner of the land. Cadastral surveys are usually performed for either re-establishment of existing property boundaries or for the creation of new property boundaries in land division process.

Detailing is a process whereby features on the ground are surveyed and represented by a suitable scale on a plan, regardless of their shape, all objects can be located by considering them as a composition of a series of connected straight lines, with each line being determined by two points.

Detail survey is a survey that a surveyor needs to record all the permanent features on the ground such as:- Buildings, land utilities, Drain, Culvert, Electric Pole, Road, Fence and all the permanent features on the ground for proper assessment of the existing development in the surveyed area or modification of it and usually confined to the boundaries of the parcel of land.

A surveyor is a professional person with the academic qualifications and technical expertise to determine, measure and represent land, three dimensional objects, points fields and trajectories; to assemble and interpret land and geographically related information, to use that information for planning and efficient administration of the land, the sea and any structure thereon.

A surveyor determines the relative positions of natural and manmade features on the earth's surface and records these in a graphical and usable form. He is also involved in the determination of the size, shape and gravity field of the earth using equipment and techniques which can sometimes be highly sophisticated (Fajemirokun1980).

Uses of Perimeter:

- ***Construction:*** Determining the length of walls, fences, or pathways.
- ***Area Calculation:*** Calculating the total length of a field or property for fencing or landscaping.
- ***Material Estimation:*** Calculating the amount of material needed for painting, tiling, or flooring.
- ***Geometric Accuracy:*** Ensuring right angles and correct measurements in buildings and structures.
- ***Navigation and Mapping:*** Determining the shortest distance between points on a map or in a geographical area.
- ***Sports and Games:*** Calculating distances for sports fields or games.

Uses of Detailing:

- ***Structural Integrity:*** Ensuring proper support for structures, especially at edges and junctures.
- ***Waterproofing and Weatherproofing:*** Designing details to prevent water leaks and damage to structures.

- ***Aesthetic Design:*** Creating visually appealing and functional edges and junctures in buildings.
- ***Accessibility and Safety:*** Designing details that ensure safe and easy access to buildings and their features.
- ***Construction Accuracy:*** Providing clear and accurate instructions for builders on how to construct specific areas.
- ***Material Coordination:*** Ensuring that different materials and elements fit together seamlessly and effectively.

Applications of Perimeter and Detail Surveys:

Property Ownership and Cadastral Mapping:

Perimeter surveys establish the boundaries of a parcel of land, while detail surveys identify features like buildings, roads, and utilities within those boundaries. This information is vital for creating survey plans, which serve as official records of land ownership and are required for land transactions.

Land Development and Planning:

Accurate perimeter and detail surveys are essential for developing land effectively. They provide the necessary data for planning layouts, designing infrastructure, and ensuring compliance with zoning regulations.

Infrastructure Projects:

These surveys are crucial for planning and constructing infrastructure projects, such as roads, pipelines, and utility lines, by providing detailed information about the existing terrain and features.

Encroachment and Boundary Disputes:

Perimeter surveys can help identify encroachments or boundary disputes by accurately delineating property lines and comparing them to existing structures or feature.

Subdivision of Land:

Perimeter surveys are used to subdivide land into smaller parcels, ensuring that each new parcel has clearly defined boundaries.

Re-establishing Missing Beacons:

If existing boundary markers (beacons) are missing or damaged, perimeter surveys can be used to re-establish them, ensuring the accuracy of property lines.

Legal Proceedings:

In land disputes, perimeter and detail surveys can provide evidence of property boundaries and ownership, supporting legal claims, according to International Federation of Surveyors (FIG).

1.2 Statement of the Problem

There is no adequate up-to-date map of the part of Kwara State Polytechnic. To aid decision making by the management. It has been observed that people find it difficult getting to their destination with all the structure and roads on ground, thus the need for ease of movement for the thousands of people passing the route. A map can provide response to questions like: where a particular road is, where it leads to, the distance and the fastest route or shortest route between two points. This survey will be used for future planning regardless of the type of construction to be carried out. Some other project where the survey will be relevant includes in designing the drainage network, road and also new building. This will definitely affect proper planning and decision making for the management.

1.4 Aim and Objectives of the Project

1.4.1 Aim of the Project

The aim of this project is to carry out perimeter and detail survey of part of Kwara polytechnic Ilorin, The New engineering building to Guarantee trust bank.

1.4.2 Objectives of the Project

The following are the objectives of the study;

- i. To carry out proper planning and reconnaissance in the office and field respectively.
- ii. To carry out traverse and determination of detail features of the survey area using Total station.
- iii. Production of a perimeter plan and a detailed perimeter plan of the area.

1.5 Scope of the Project

The scope includes the following:-

- Boundary definition
- Area determination
- Feature detailing
- Documentation
- Traverse connection to established controls.
- Perimeter traversing
- Detailing of features using offset
- Data Downloading and Processing
- Data editing
- Analysis of result

- Plotting and plan production

1.6 Significance of the study

This study would be of high significance, as it can find applications in the following areas;

Is a crucial for accurately defining property boundaries, preventing disputes, and ensuring proper land use and development. It involves measuring and documenting the perimeter of a property, including boundaries points, and often includes details like fences, hedges and visible utilities.

- As it will help to produce a well detailed survey plan
- Building location and facility planning could be well aided.
- Proper planning on the usage of the vacant land.
- Proper planning of drainage system within the case study.

1.7 PERSONNEL

The under listed names are the member of the group who participate immensely in project given

| S/N | NAMES | MATRIC NO | ROLE |
|-----|-----------------------------|-------------------|--------|
| 1 | AREMU OLUWASAYO AYOKUNLE | ND/23/SGI/FT/0040 | AUTHOR |
| 2 | OLAJIDE HANNAH IBUKUNOLUWA | ND/23/SGI/FT/039 | MEMBER |
| 3 | OROKUNLE IDOWU OLUWASUKUNMI | ND/23/SGI/FT/0036 | MEMBER |
| 4 | AREO JOSHUA OLUWASEUN | ND/23/SGI/FT/031 | MEMBER |
| 5 | ASHAOLU SAMUEL TEMIDAYO | ND/23/SGI/FT/030 | MEMBER |
| 6 | OGUNBIYI ADENIKE OMOWUMI | ND/23/SGI/FT/037 | MEMBER |
| 7 | LAFIA ISHIAK ALHASSAH | ND/23/SGI/FT/033 | MEMBER |

1.8 Study Area

The project site is located at Kwara State Polytechnic (The New engineering building to Guarantee trust bank.), Ilorin Kwara State of Nigeria having a latitude of N 8° 28' 55.4196" and Longitude of E 4° 31' 34.4208".

MAP OF STUDY AREA

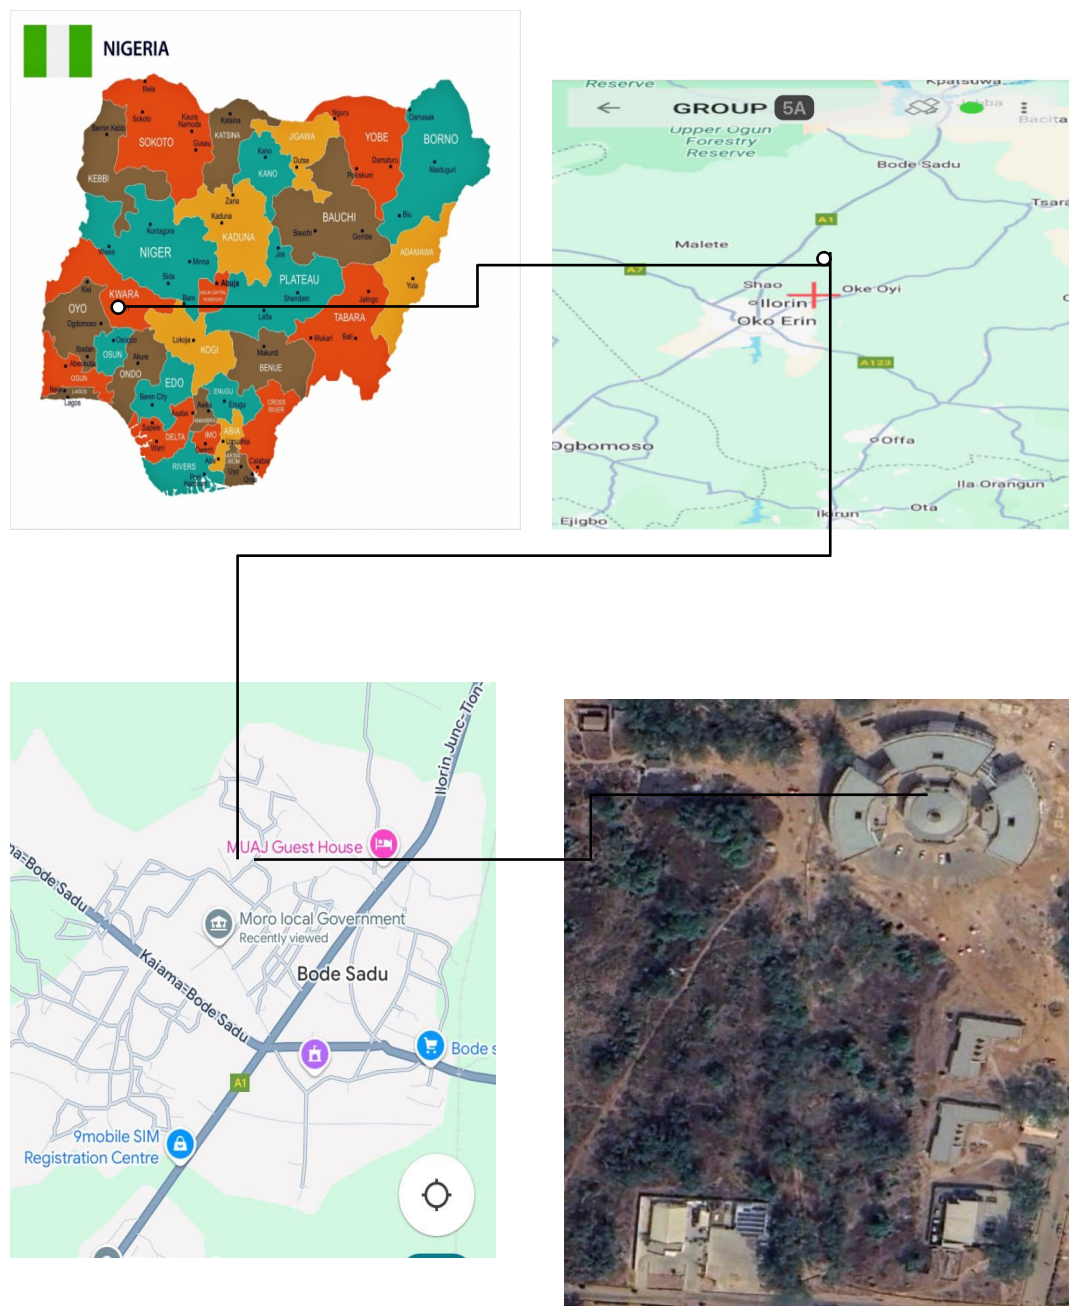


Fig 1: Image showing the study

CHAPTER 2

LITERATURE REVIEW

Perimeter and detailing, as areas of focus within construction and architectural design, play a crucial role in the overall success and functionality of a building project. The term “perimeter” refers to the boundary or outer limits of a structure, encompassing both the physical barrier created by walls, fences, or other elements, as well as the broader conceptual understanding of a building’s relationship with its surrounding environment. Detailing, on the other hand, delves into the meticulous aspects of construction that concern both aesthetic appeal and structural integrity. Together, these two elements significantly influence the physical, aesthetic, and functional aspects of a building, ultimately affecting its durability, energy efficiency, and overall visual impact.

The perimeter is often the first line of defense in terms of security and environmental protection. It serves to define the space, distinguishing public areas from private ones, while providing a layer of protection against external forces such as weather, theft, and vandalism. In urban settings, the perimeter may also serve as a critical element in defining the relationship between a building and its surrounding context, where considerations such as sightlines, accessibility, and urban integration become paramount. Moreover, advancements in technology have

led to the exploration of innovative perimeter solutions, such as integrated security systems that use surveillance and access control to enhance safety without compromising accessibility.

The detailing of a building encompasses a wide array of practices that contribute to both its functionality and visual appeal. From the choice of materials to the design of joints and intersections, detailing requires a comprehensive understanding of architectural principles and construction processes. Effective detailing not only enhances the aesthetics of a building but also plays a significant role in energy efficiency and sustainability. For example, proper detailing in windows and doors can minimize air leaks while maximizing natural light, contributing to reduced energy consumption and enhanced occupant comfort.

The relationship between perimeter and detailing is particularly important in the context of environmental considerations. As sustainable building practices continue to gain momentum, architects and builders increasingly prioritize designs that reduce environmental impact while maximizing efficiency. This includes attention to how the perimeter can be designed to enhance thermal performance, reduce solar gain, and create microclimates that contribute to the building's overall sustainability. Innovations such as green roofs, living walls, and reflective materials are often integrated into perimeter designs to alleviate heat island effects and enhance biodiversity.

Furthermore, the detailing of building facades must address the challenges posed by climate and geography. For example, in areas prone to heavy rainfall, details such as flashings and weep holes must be meticulously designed to ensure that water is effectively diverted away from structural elements, thus preventing moisture-related damage over time. Similarly, in regions subject to high winds, perimeter detailing must include reinforcement and anchoring systems that ensure the building's integrity under severe weather conditions. Detailing that accommodates thermal expansion and contraction is essential to mitigate cracking and structural failures, emphasizing the intricacies involved in crafting a successful design.

Accessibility is another aspect that cannot be overlooked when considering perimeter and detailing. The standards set forth by regulations such as the Americans with Disabilities Act (ADA) necessitate attention to how peripheries are designed and detailed to ensure they are navigable for individuals with disabilities. This includes considerations of slope, surface materials, and the placement of ramps and handrails, ensuring that access to and from a building is both functional and compliant with modern standards.

Through the lens of aesthetics, perimeter and detailing also serve to communicate a building's identity and purpose. The selection of materials, colors, and finishes can create visual harmony between a structure and its environment,

while intricate detailing can convey craftsmanship and attention to quality. The layering of various materials and the careful design of transitions between different elements contribute to a building's personality, and meticulous detailing often elevates the overall architectural narrative.

As the construction industry evolves, the integration of advanced technologies, such as Building Information Modeling (BIM), is reshaping the way perimeter and detailing are approached. BIM allows architects and builders to visualize and assess how different design choices impact the overall performance of a building. This iterative design process can lead to more informed decisions regarding materials, connections, and overall building performance, ensuring that both the perimeter and detailing are optimized for longevity and sustainability. The interdependence of these aspects also inspires collaboration among architects, engineers, and contractors, promoting a more holistic approach to building design that values every element of the construction process.

In conclusion, the interrelated concepts of perimeter and detailing are foundational to the architectural and construction disciplines. They not only define the physical boundaries and visual characteristics of buildings but also play a crucial role in determining their performance, sustainability, and user experience. As demands for greater efficiency, environmental responsibility, and aesthetic appeal continue to shape the industry, a deep understanding of these elements will

remain essential for architects and builders alike. The future of construction will undoubtedly rely on innovation in both perimeter and detailing practices, as projects evolve to meet the needs of a changing world while upholding the principles of good design and sustainability

CHAPTER THREE

METHODOLOGY

3.0 Methodology

This refers to the method and the principles used to achieve the aim and objectives of this project work. The execution of this project was based on the following basic principles of surveying:

- Working from whole to part.
 - The principle of choosing the method of survey most appropriate to meet the desired result.
 - The principle of provision for adequate checks to meet the required accuracy.
- The method are traversing and detailing.

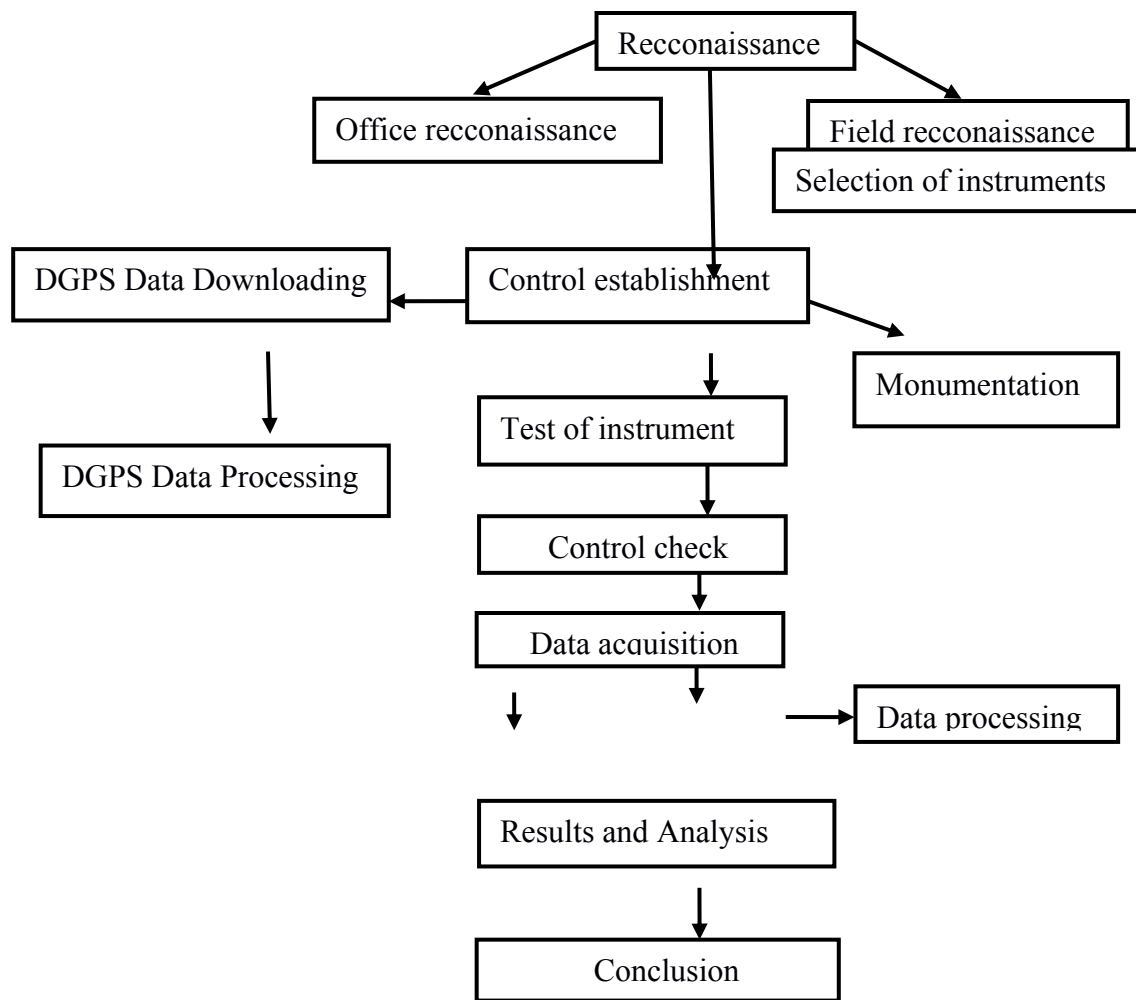


Figure 3.0:- Research methodology flow chart

3.1 Reconnaissance

Reconnaissance is a pre-requisite stage of any survey project to be carried out. It is the study of the subject matter as regard to a particular survey of an area of land. During reconnaissance, the purpose, specification and required accuracy of

the survey were closely examined as these would affect the choice of the instruments and method of survey to be employed. The reconnaissance done comprise of office planning and field reconnaissance.

3.1.1 Office Reconnaissance

At this stage, decisions were made on the easiest approach to achieve the aim of the project using available sources of information about the study area and also the nature of survey. The imagery of the study area, personnel, initial control for orientation, choice of instrument and method to be employed were considered and determined at this stage. Also costing of the survey operation was done in the office.

3.1.2 Field Reconnaissance

The project site was visited to have the true picture of the site for better planning and execution and to locate the control pillars for necessary orientation of the study area. For proper selection of the boundary stations, the following factors were taken into consideration, the position and shape of the boundary, indivisibility of the consecutive stations selected. The boundaries were marked with wooden pegs driven into the ground to avoid disturbance or removal by any one and for the proper identification. The intervisibility of these selected stations were put into consideration.

Controls were not found around the study area which necessitated the transfer of control points to a reasonable distance within the study area. The end product of the field reconnaissance is the recce diagram which is shown in figure 3.2 below.

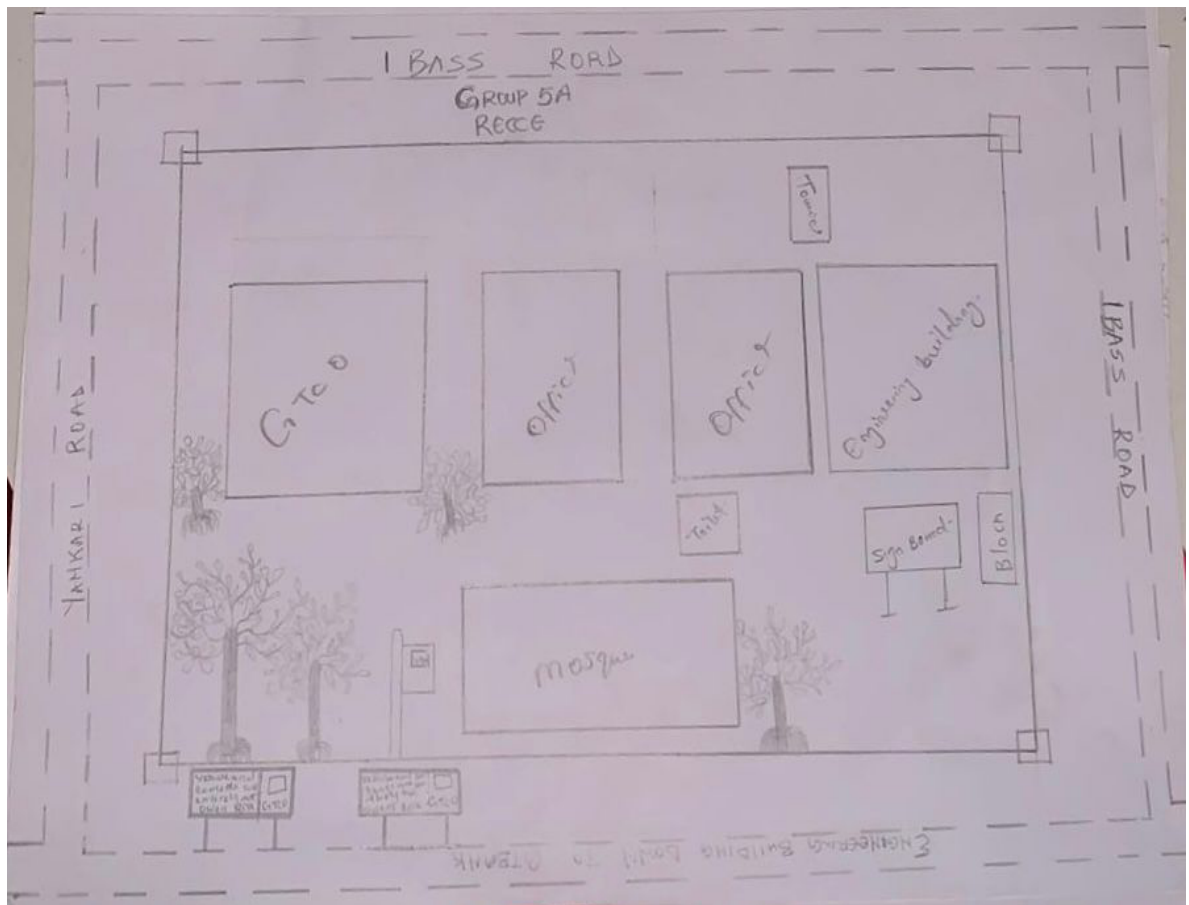


Figure 3.1.2: Reconnaissance Diagram (Not drawn to scale)

3.2 Monumentation

This is the selection of points at all change of directions and defining the points using pegs, beacons upon which centering can be made during field operation. This could be temporary or permanent, depending on the nature of the work. Specifically for this project, precast concrete beacons of dimension 18cm by 18cm by 65cm height were used. Each was buried vertically such that 10cm protruded above the ground surface.

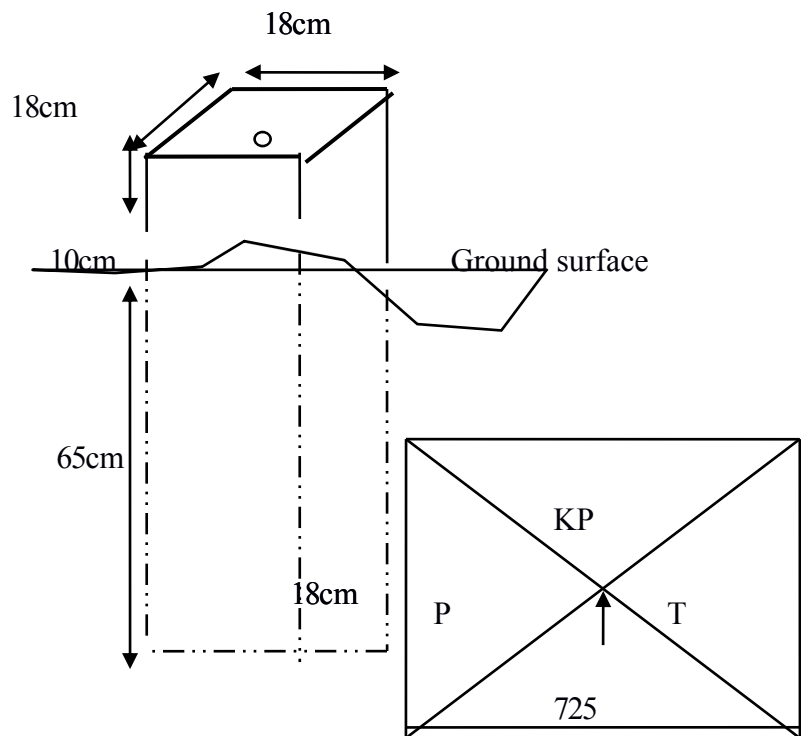


Figure 3.2.1: Plan View

Figure3.2.1:-Dimensional Representation Of Boundary Beacon

3.3 Equipment Used

The instrument used for the execution of the project are listed below

- Differential Global Positioning System (DGPS)
- Total station and its accessories (Trimble)
- Reflector stand and target
- Beacon
- pegs
- Tape (5m)
- Writing materials

Other Hardware and software used include:

- (i.) Laptop
- (ii.) GNSS solution
- (iii.) Trimble software office
- (iv.) Trimble Geo office downloading cable.
- (v.) AutoCAD 2010
- (vi.) Notepad and Microsoft Excel for editing and running of the script
- (vii.) Microsoft word for report writing

3.3.1 Perimeter Survey and Detailing Observation

The perimeter and detail observation was carried out using the total station. This was done carefully in such a way to achieve the desire objective for the project. Before observation, test of instrument was carried out.

3.3.1.1 Test of Instrument

Test of instrument is very important in surveying operation. The accuracy of any work done depends on the quality of the instrument used, using faulty instrument will mar the output of the work.

In view of this, test of instrument was done in order to ascertain the working condition of the instrument acquired from the departmental store.

3.4. Collimation of Test For Total Station

The instrument total station (TRIMBLE PT1) was tested for both horizontal and vertical collimation errors. This was done by setting the instrument on a station and applying all necessary temporary adjustment such as centering, leveling and parallax elimination.

The coordinates of the known station (KW725PT) was inputted into the instrument. The target was also placed on another known station (KW111PT) and

was carefully bisected and measured at the end the result supplied were compared with the available result (see table 3.4)

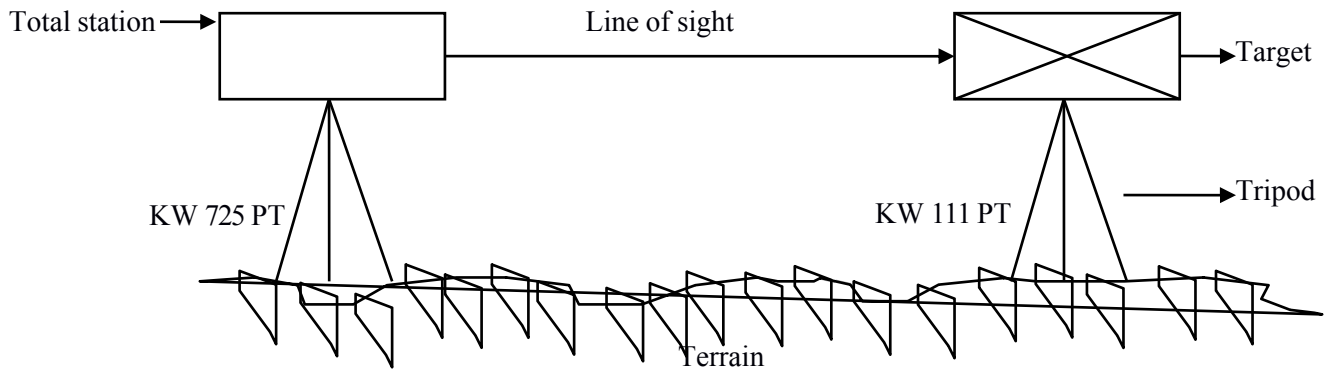


FIG 3.4:- Diagram showing the position of the total station and the reflector during the total station (collimation test).

3.5 Data Acquisition

This involves the processes in acquiring the data needed for the project. This involves the actual making of measurements and recording of observed data on the field. There are different methods of acquiring data in the site with different instrument such as Total station, Theodolite, Compass, Level Instrument etc.

3.5.1 Geometric Data Acquisition For Perimeter Traverse

Geometric data are positional data, that is, they are data having the X, Y, Z coordinates which makes it possible to locate their position on the surface of the earth. The total station (TRIMBLE PT1) was used for collection of geometric data. The third order closed traverse was carried out using Trimble Total Station to determine the positions of all stations in the project area. For perimeter traverse, total station was set up on control pillar KW725PT and temporary adjustment performed. The coordinates of the instrument station, Backsight station the heights of instrument and that of the target were measured with tape and keyed-in into the memory of the total station for storage and the orientation was completed. After this, the target was moved to SC/KW F.RS 4404 for observation. With the instrument on KW725PT, the target was focused and the cross-hair bisected msr1 was clicked on the total station. The instrument displayed the coordinates (E, N and H) of the station and the values were stored in the memory of the instrument which serves as field book. Then, the instrument was moved to KW111PT orientation was repeated and the same procedures were taken until we closed back on the control pillar KW725PT.

KW725PT  KW111PT
Figure 3.5:- Description of the traverse connection

3.5.2 Geometric Data Acquisition For Detailing

For the collection of details, the total station was set up on KW111PT and temporary adjustments were performed and back sighted KW725PT for station orientation. Then, various points of interest were coordinated by placing the reflector at such points and measure. The coordinates of such points taken were stored in the internal memory of the instrument and on the field book. For points which could not be visualized from KW111PT, other station points were selected to facilitate their coordination. Feature like buildings, electric poles, trees and water tank, road, security house and mosque were all detailed, after which the traverse was closed back on KW111PT. Having bisected these features, readings were taken and stored in the internal memory of the instrument.

3.6 Perimeter Traversing

After the demarcation, capping and numbering of the beacons, the actual data acquisition using the total station MATO TC1010 commenced. The traverse started from KW725PT with KW111PT as reference point. The total station was set up over control KW725PT, centered, leveled and telescope focused to eliminate parallax. The parameters of the instrument station i.e. station name, height of instrument over the station mark, and the XYZ coordinates of the station were keyed in. The reference control point was then bisected and the station name

KW111PT, height of target over the station mark, and the XYZ coordinates of the station were key in. Though the total station was set in coordinate mode it actually measured and recorded horizontal readings, vertical readings and distances automatically into the internal memory of the instrument on both faces which it used to compute and display coordinates. At every set up of the total station, the temporary adjustment was carried out and the following parameters measured:

- Height of instrument
- Height of the back target
- Height of the fore target
- Distance to back and fore station

This is the determination of bearing and distance of series of connected lines from known coordinated point so as to obtain coordinate of the newly established station.

3.7 Data Downloading

This explains the method in downloading, retrieving, sorting and analyzing of the acquired data (field data). Here, the data is being downloaded from the total station to a computer system and processed into information using the appropriate method and software.

Steps To Follow When Downloading From Total Station

- The downloading software was already installed on the computer system (Trimble Total Station Software) and was launched.
- The total station was connected to the computer system via downloading cable
- The Total station was switched on and the following options were selected to download the file.
 - GOTO Data Transfer
 - SELECT Send data (by pressing F1)
 - SELECT/CLICK Measure Data
 - SELECT File Name (Hafiz)
 - CLICK ENTER
 - SELECT Yes (Option)
- It was ensured that the parameter on total station and the computer system were the same.
- A folder was created on the laptop to save the data from the software and the link selected on the software.
- Transfer was clicked on the total station software to download the file into a folder on the laptop.
- After the transfer was completed, click on transform coordinate on the total

station software resident in the computer system. After converting the required data into dxf format.

- The coordinates were exported from the software environment to Microsoft excel for further processing

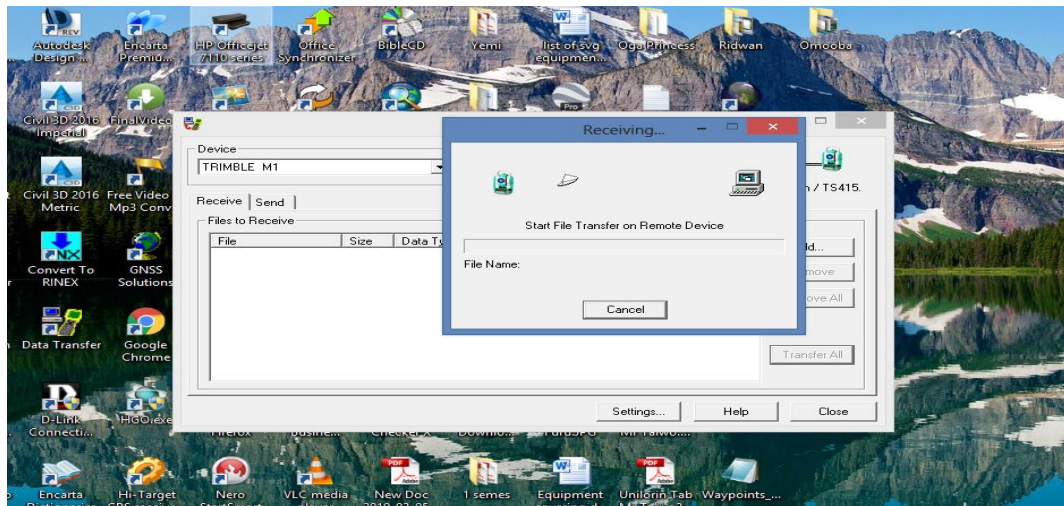


Figure 3.6a: Downloading process from total station

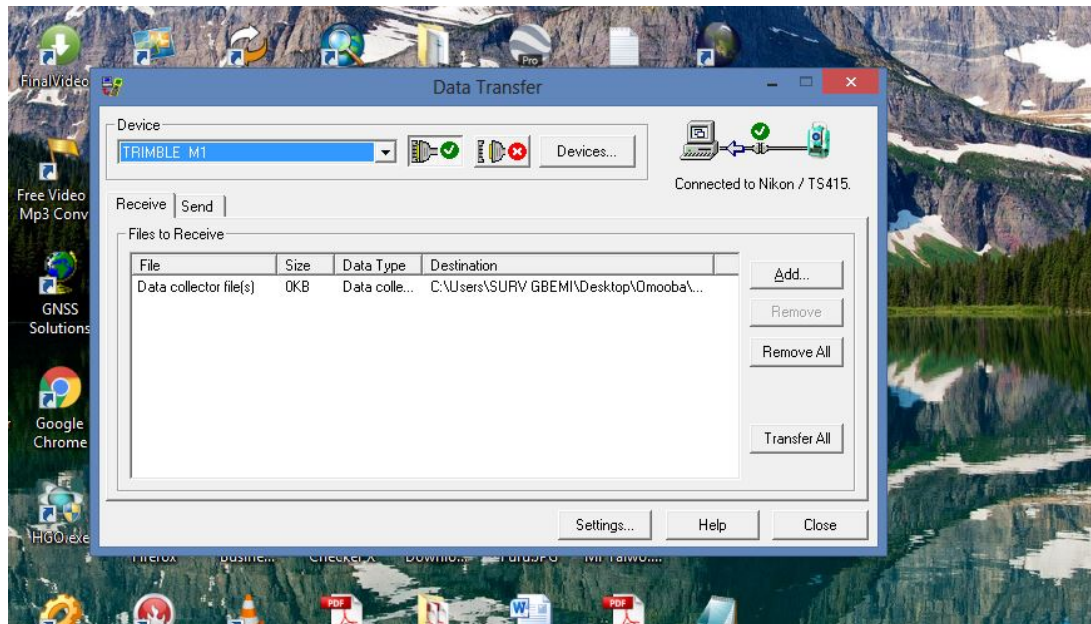


Figure3.6b: Downloading process from total station

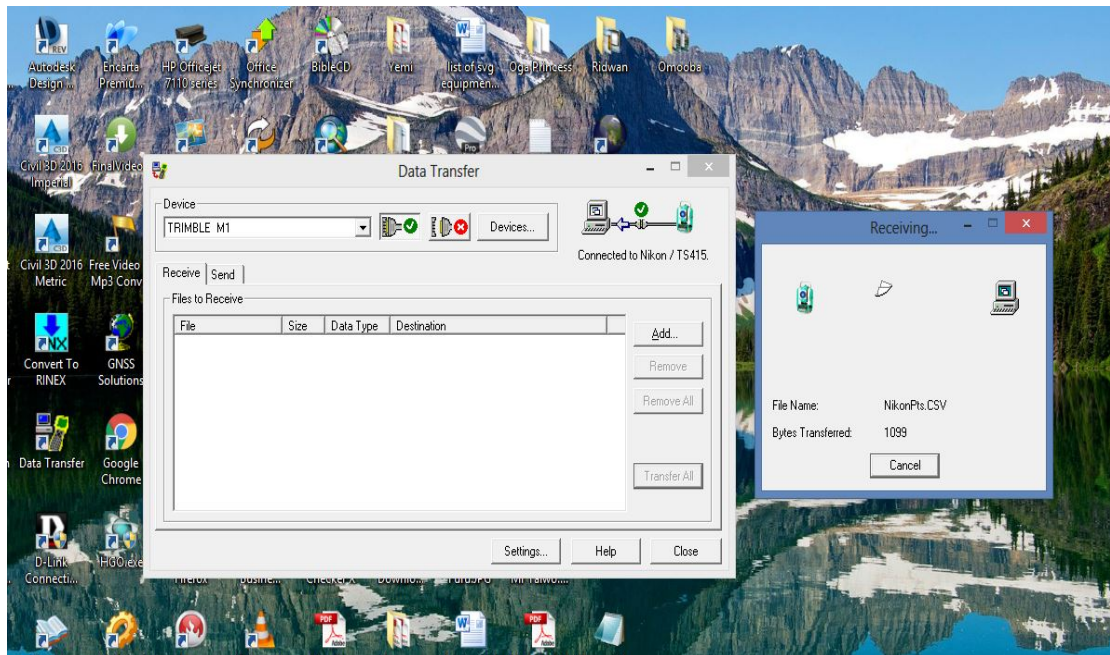


Figure 3.6c: Downloading process from total station

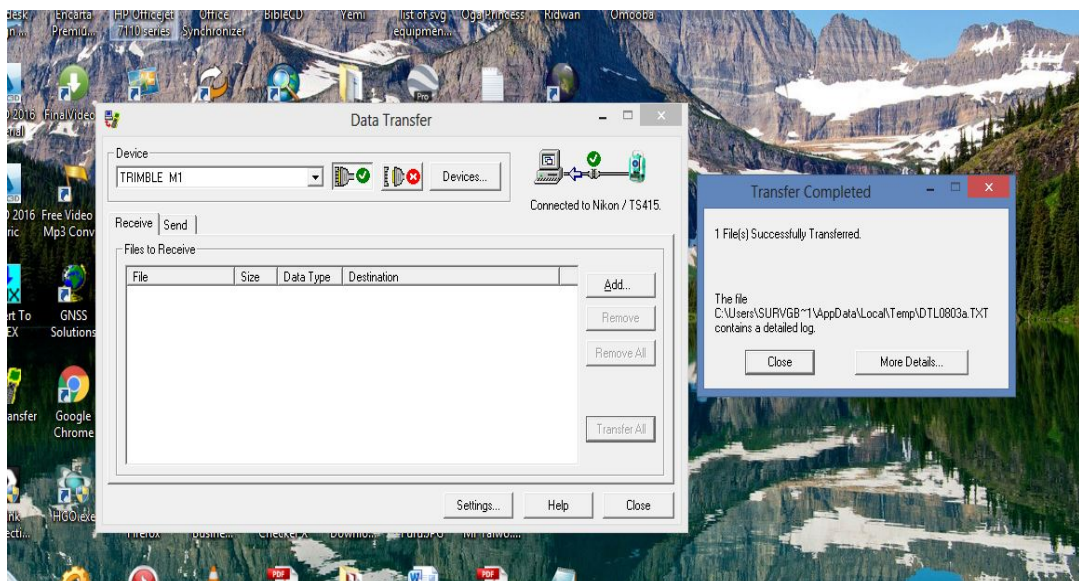


Figure 3.6d: Downloading process from total station

3.7.1.1 Data Processing

As the instrument downloading cable is faulty, Microsoft Excel 2007 Software was used to type the final coordinates of all points except the unwanted

3.7.1.2 Data Editing

The downloaded data were edited in the Microsoft Excel environment before the edited data were exported to Notepad. During the editing process, the irrelevant and redundant data were removed while edited data were saved in a plotable format of file.scr.

3.8 Computations

Computation can be said to be calculations of a kind or another from a large part of the work of surveying and the ability to compute with speed and accuracy is an important qualification for the surveyor.

Computations are made algebraically by the use of simple arithmetical procedures and trigonometric functions and graphically by accurate scaled drawing. Computation come up after field work and is very important in survey work because it serves as the final information shown on plan.

Computation is the operation carried out when the raw data obtain from the field has been processed to obtain final result from which plans were produced.

The various computation procedures carried out in this project are analyzed as follows.

After the field book has been deduced the following computation were carried out

- Traverse backward computation.
- Area computation.
- Linear accuracy.

3.8.1 Traverse Backward Computation

The processed boundary data downloaded from the instrument and the already existing control information were used to determine the latitude, departure, bearings and distances of traverse lines as shown in the table below

Bearing of line =

$$\text{Distance (L)} = \sqrt{(\Delta N)^2 + (\Delta E)^2}$$

The back computation was done in order o have final bearing and distance of the boundary lines.

The below formulae was used

$$\Delta N = N_2 - N_1, N_3 - N_2$$

$$\Delta E = E_2 - E_1, E_3 - E_2$$

Putting the sign they carried into consideration

$$\text{Distance} = \sqrt{(\Delta N)^2 + (\Delta E)^2}$$

Bearing =




Where


ΔN is difference in northing (m)

ΔE is difference in easting (m)

3.9 Area Computation

Using cross coordinates method, area computation was done by a small program in an excel spread sheet. The results were as shown below:

| | | |
|--------------|---|-------------|
| NORTHING (A) |  | EASTING (A) |
| NORTHING (B) |  | EASTING (B) |
| NORTHING (C) |  | EASTING (C) |



$$\text{AREA} = \frac{\text{LEFT SIDE PRODUCT} - \text{RIGHT SIDE PRODUCT}}{2}$$

2

3.9.1 Linear Accuracy

The linear accuracy was calculated according to the specifications by Surveyors Registration Council of Nigeria (SURCON). Since this is classified as third order job, the following formula was used:

$$\text{Linear Accuracy} = \frac{1}{50000}$$

CHAPTER FOUR

RESULTS AND DATA ANALYSIS

4.1 Results

This presents the results and explains how data obtained from field were analyzed, processed, plotted and presented.

4.1.1 Control Establishment Result

After processing of the data acquired during the control extension, the results of the controls established are as shown in table 4.1.

Table 4.1: Control Established

| PL ID | Easting | Northing | Heights |
|---------|-----------|-----------|---------|
| KW TL02 | 679751.84 | 946272.55 | 343.452 |
| KW725PT | 679689.67 | 946321.81 | 344.737 |
| KW111PT | 679836.92 | 946009.53 | 328.57 |

4.1.2:- Test Of Instrument

The instrument in view is the total station used to carry out the perimeter survey observations.

Table 4.2:-Test Observation

| Station | Readings | Northings(M) | Eastings (M) | Bearing | Dist(M) |
|----------------|-----------------------|--------------|--------------|---------------|---------|
| Target Station | Initial Reading | 946009.53 | 679836.92 | 141°57'10.6'' | 321.156 |
| | Total Station Reading | 946009.89 | 679836.46 | 141°57'10.6'' | 321.156 |
| | Differences | -0.46 | 0.36 | 00°00'00'' | 0.001 |

Source: Field Observation

It is evident that the instrument is in good working condition.

4.3 Control check

The controls used were checked to determine if they were still in-situ, the results are given in table 4.3a and 4.3b

Table 4.3a Control Checks (Observed values)

| Station From | Bearing (° ' ") | Distance (m) | Northings (m) | Eastings (m) | Station To |
|-------------------------|-----------------------------|-------------------------|--------------------------|---------------------|-----------------------|
| KW 725 PT | 154° 45' 16.3" | 345.278 | 946321.83 | 679689.66 | KW 725 PT |
| KW 111 PT | 141° 57' 10.6" | 321.156 | 946009.53 | 679836.92 | KW 111 PT |

Source: Field Observation

Table 4.3b Control Check (Computed Values)

| Station From | Bearing (° ' ") | Distance (m) | Northing s (m) | Eastings (m) | Station To |
|-------------------------|-----------------------------|-------------------------|---------------------------|-------------------------|-------------------|
| KW 725 PT | 154° 45' 16.3" | 345.278 | 946321.81 | 679689.67 | KW 725 PT |
| KW 111 PT | 141° 57' 10.7" | 321.156 | 928399.49 4 | 683747.73 8 | KW 111 PT |

4.4 Traverse Back Computation

Table 4.4:. Back computation of the traverse

| Station from | Bearing | Dist (m) | ΔN | ΔE | Northing (m) | Easting (m) | Station To |
|-----------------------|--------------|-------------|-------------|------------|-----------------|----------------|-----------------------|
| | | | | | 946321.81 | 679689.67 | SC/KW F.RS 4404 |
| SC/KW F.RS 4404 | 03°26'47.8" | 195.6 1 | 11.76 | 195.26 | 946333.57 | 679884.93 | SC/KW F.RS 4405 |
| SC/KW F.RS 4405 | 81°34'20.37" | 327.5 8 | - 324.04 | -48.01 | 946009.53 | 679836.92 | SC/KW F.RS 4406 |
| SC/KW F.RS 4406 | 177°0'34.39" | 83.57 | 4.36 | -83.46 | 946013.89 | 679753.46 | SC/KW F.RS 4407 |
| SC/KW F.RS 4407 | 11°42'14.6" | 314.3 6 | 30.92 | -63.79 | 946321.81 | 679689.67 | SC/KW F.RS 4404 |

4.5 Area Computation

Table 4.5: Results of Area Computation

| | Coordinates | | | |
|----------|-------------------|------------------|--------------------|-----------------------|
| | Final Northing | Final Easting | Left Side Product | Right Side Product |
| Stn. Id. | (m) | (m) | (m ²) | (m ²) |
| A | 946321.81 | 679689.67 | | |
| B | 946333.57 | 679884.93 | 6433899375749.3232 | 643213151903.2219 |
| C | 946009.53 | 679836.92 | 643352499521.4044 | 643177623083.3829 |
| D | 946013.89 | 679753.46 | 643053251210.4738 | 643135169254.8187 |

| | | | | |
|---|-----------|---|-------------------|------------------------|
| A | 946321.81 | 679689.67 | 642995868709.5162 | 643265524620.9626 |
| | | SUM = | 2572791556990.718 | 2572791468862.385 7 |
| | AREA = | <u>LEFT SIDE PRODUCT - RIGHT SIDE PRODUCT</u> | | |
| | | | 2 | |
| | AREA = | <u>2572791556990.718- 2572791468862.3857</u> | | |
| | | | 2 | |
| | AREA = | <u>88128.3323</u> | - | - |
| | | 2 | | |
| | AREA = | 44064.166 | Sqmtrs | |
| | AREA = | 4.406 | Hectares | |

The total area was found to be **4.406Hectares** and the perimeter was **1023.052m**.

4.6 Linear Accuracy

Linear Accuracy =

Table 4.6: Results for linear accuracy

| Remarks | Eastings(M) | Northings(M) | Hts (M) | Stn |
|-------------------------------|-------------|--------------|---------|-------------|
| Starting Coord. (original) | 679689.67 | 946321.81 | 344.737 | KW725P T |
| Closing Coord. (observed) | 679689.46 | 946321.89 | 344.71 | KW725P T |
| Difference | -0.21 | -0.08 | +0.027 | |

Misclosure in northing (ΔN) = -0.08

Misclosure in easting (ΔE) = -0.21

Total distance = 1059.05

=

=

=

= 1: 8050.412145

The linear accuracy is **1:8050** which conforms with the Third order accuracy.

4.7 Data Analysis

Table 4.7 shows the perimeter survey boundary points seven (5) number of points defines the perimeter of the institute.

Table 4.7: The Perimeter Boundary Points

| Station | Northings (M) | Eastings (M) | Height (M) |
|-----------------|----------------------|---------------------|-------------------|
| SC/KW F.RS 4404 | 946421.81 | 679689.67 | 344.737 |
| SC/KW F.RS 4405 | 946333.57 | 679884.93 | 338.481 |
| SC/KW F.RS 4406 | 946009.53 | 679836.92 | 328.57 |
| SC/KW F.RS 4407 | 946013.89 | 679753.46 | 325.71 |
| SC/KW F.RS 4404 | 946321.81 | 679689.67 | 344.737 |

The coordinates of the details such as buildings, GTB, trees, office, mosque, toilets, signboards and roads were also obtained and are as shown in appendix A

4.8 Information Presentation

The end product of this project exercise was the graphical representation of the processed field data of the survey area which was drawn to a suitable scale. The digital representation of the project area was done according to survey rules and regulations as well as departmental instructions.

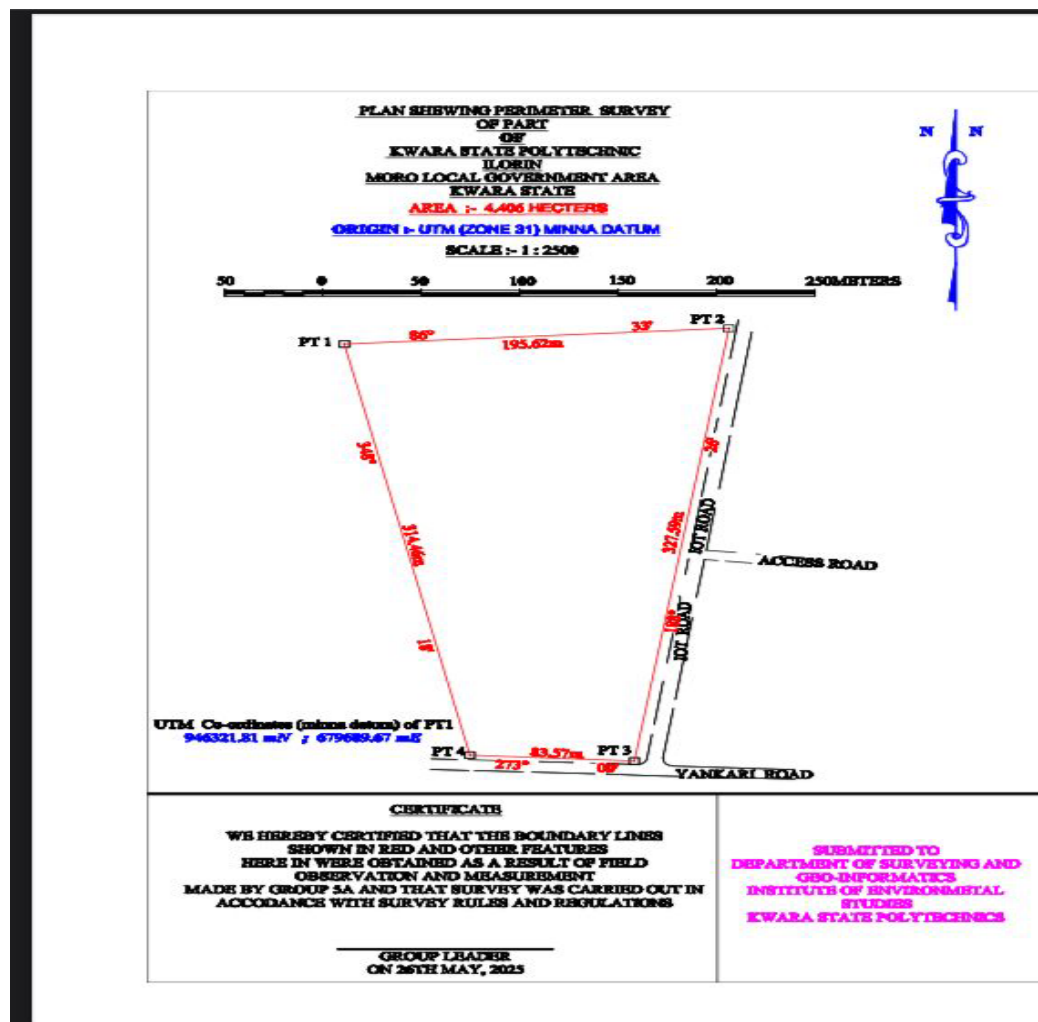


Figure 4.1: Perimeter plan of the study area

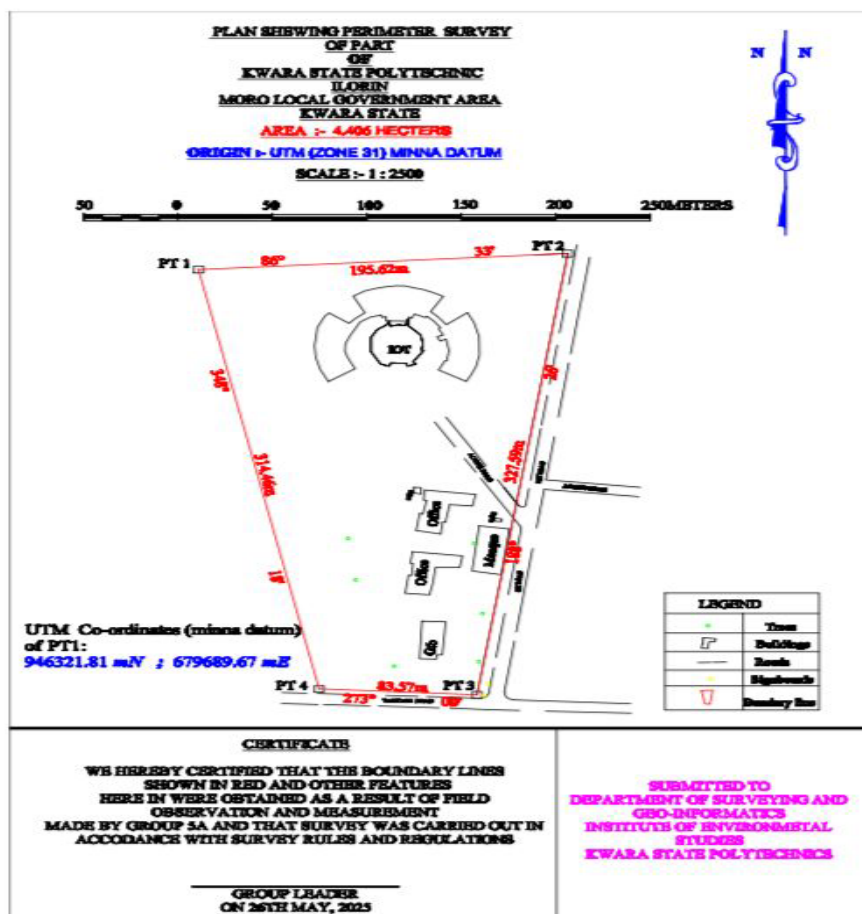


Figure 4.2: Perimeter and detail plan of the study area

CHAPTER FIVE

SUMMERY, CONCLUSION AND RECOMMENDATION

5.1 SUMMARY

The project perimeter and detailing survey was carried out at Kwara State Polytechnic Part of engineering building down to GTBANK. The project is carried out in accordance with the two order specification. The reconnaissance survey was properly carried out and office, this was done for proper planning of the operation by cheating initial controls that is within the project site for the orientation, the instrument to be used, and selected station in which the indivisibility of the selected station were put into consideration and finally, drawing of selected diagram of the area to be surveyed.

The field operation includes (traversing and detailing). Therefore data processing was done and plan was produced in analysis (manual) and digital format tithe plan showing perimeter and detail of all project was executed

5.2 PROBLEM ENCOUNTER

The problem encountered during the process of the execution of this project

1. Student passing by were obstructing the right of observer and causing disturbance.
2. The weather was not conducive and it was draining all days.

5.3 CONCLUSION

Have gone through all stages of this project, it is right to say the task is well interesting particularly at the planning and execution stage though field procedure was very tedious and time consuming from all indications. The project has been successfully executed and adequate data acquired processed represented in plans all necessary computations were carried out to meet specification is given finally, the following project has been exposed me to the procedure of cadastral survey and perimeter and detail survey also the task has given me a self confidence on it has improved my skills in carrying out perimeter and details survey. Despite the fact that I have not done this before but in still achieving aim and objective of the project. Plan of the study were produced, the survey was executed in the accordance and respect with survey rules and the departmental instruction in carrying out the project topics. And conclusively the report written was done on how the entire project was executed both field and office work.

5.4 RECOMMENDATIONS

As a result of the experience acquired during the course of executing this project, I hereby recommend that this kind of project should be a continuous one in order to boost the student's knowledge within and outside the citadel of learning. I also recommend that practical within the semester of the project should be given a time and instrument should be distributed on time so that practical assignment will

not with the project.

I also recommend this particular project practical to be done often to update the infrastructural features and the society for the development of the particular area, also it should be carried out in school for the next development in the premises, moreover it is necessary for every Survey & Geo-Informatics Students to be able to carry out this particular practical.

Also that the school provide more new digital station, EDM and analogue instruments should be supply to the school store for student in carrying out both their practical and project in order to get accurate data from the field.

REFERENCES

- Abdulsalam Ayuba and Raymond (1990): London, pitha publishing limited Surveying 4th edition
- Bassak N.N (1994): surveying and leveling 7th edition Tata N.C. Hill publicity company limited, new delhi paje city
- Bonford. G (1984) Geodessy 4th edition, oxford university press city Brinker, R.C (1997). Elementary surveying 2nd edition, Barting the Madam Mahan Das, MM, Das Saikia put int 2010. Maitias walde muitan, 19th century 1780.
- Microsoft encata (2009). One Microsoft produced was 980326399 USA.
- Oxford advance learning dictionary 2001 6th edition, oxford university Puri walter street.
- Punmia, B.C (2003) surveying vol 1 and II 6th edition, laxmi india P.32
- Ramsay, J. (1971): Land surveying 4th edition chances process limited bungay lam
- Raymond, S (1972): Elementary surveying 6th edition. Simeon (1989) pamphlets specification for geodetic survey in Nigeria P, SI.54
- Oliver J.G Clending (1978) Principles of Surveying Working Ham Berkshire, England ppl.
- Surveyor R.S. Awolaye HOD, (2018): surveyor Bayi Akinyele (2018) Barrister A, surveyor

APPENDICES

APPENDIX A: SORTED ACQUIRED DATAS

APPENDIX B: PERIMETER AND DETAIL PLAN IN ENVELOPE

APPENDIX A

SORTED ACQUIRED DATAS

CONTROL USED

| POINT ID | EASTING | NORTHING | HEIGHT |
|----------|------------|------------|---------|
| KW725PT | 679689.671 | 946321.807 | 344.737 |
| KW111PT | 679836.916 | 946009.525 | 328.57 |

PERIMETER POINTS

| POINT ID | EASTING | NORTHING | HEIGHT |
|------------|------------|------------|---------|
| SC/KW F.RS | | | |
| 4404 | 679689.671 | 946321.807 | 339.655 |
| SC/KW F.RS | | | |
| 4405 | 679884.932 | 946333.571 | 340.917 |
| SC/KW F.RS | | | |
| 4406 | 679836.916 | 946009.525 | 341.958 |
| SC/KW F.RS | 679753.459 | 946013.889 | 342.848 |

4407

SC/KW F.RS

343.452

4404 679689.67 946321.807

DETAIL POINTS

| POINT ID | EASTING | NORTHING | HEIGHT |
|----------|------------|------------|---------|
| EG1 | 679758.321 | 946239.632 | 344.084 |
| EG2 | 679754.063 | 946248.243 | 344.24 |
| BL1 | 679751.63 | 946257.142 | 344.164 |
| EG3 | 679751.011 | 946266.072 | 343.997 |
| EG4 | 679751.841 | 946272.552 | 343.954 |
| | | | 343.867 |
| BL2 | 679752.551 | 946279.262 | |
| EG5 | 679756.371 | 946287.501 | 343.803 |
| EG6 | 679758.576 | 946289.906 | 343.609 |

| | | | |
|------|------------|------------|---------|
| EG7 | 679769.145 | 946282.317 | 343.418 |
| EG8 | 679772.746 | 946286.056 | 343.223 |
| EG9 | 679777.631 | 946290.125 | 342.998 |
| BL3 | 679771.545 | 946302.256 | 342.702 |
| BL4 | 679777.585 | 946306.165 | 342.464 |
| OFF1 | 679804.82 | 946130.166 | 342.176 |
| OFF2 | 679806.553 | 946142.711 | 341.918 |
| OFF3 | 679808.381 | 946142.4 | 341.65 |
| BL5 | 679810.251 | 946152.25 | 342.447 |
| OFF4 | 679808.639 | 946152.645 | 342.32 |
| OFF | 679809.212 | 946159.839 | 342.135 |
| BL5 | 679836.221 | 946156.67 | 340.809 |
| W11 | 679834.491 | 946148.172 | 340.455 |
| EG10 | 679822.443 | 946149.114 | 339.173 |

| | | | |
|-------|------------|------------|---------|
| CL1 | 679820.121 | 946136.201 | 337.856 |
| OFF6 | 679818.791 | 946136.312 | 337.259 |
| OFF7 | 679817.762 | 946127.563 | 336.735 |
| OFF8 | 679804.823 | 946130.174 | 336.202 |
| TL1 | 679803.381 | 946161.872 | 338.847 |
| TI 2 | 679807.183 | 946161.612 | 339.603 |
| TL3 | 679807.433 | 946157.032 | 339.536 |
| TL4 | 679803.541 | 946157.623 | 340.18 |
| TL5 | 679803.382 | 946161.871 | 341.117 |
| OFF9 | 679802.871 | 946114.623 | 341.166 |
| OFF10 | 679829.342 | 946111.532 | 341.589 |
| OFF11 | 679827.832 | 946102.981 | 341.487 |
| OFF12 | 679814.952 | 946103.281 | 342.113 |
| BL6 | 679813.531 | 946091.342 | 342.133 |

| | | | |
|-------|------------|------------|---------|
| CL2 | 679811.82 | 946082.893 | 342.564 |
| OFF13 | 679798.951 | 946084.122 | 342.686 |
| OFF14 | 679800.742 | 946097.313 | 342.775 |
| OFF15 | 679802.322 | 946097.031 | 343.059 |
| OFF16 | 679803.172 | 946105.841 | 343.277 |
| OFF7 | 679801.641 | 946106.072 | 343.323 |
| OFF18 | | | 343.498 |
| | 679802.872 | 946114.621 | |
| GTB1 | 679807.852 | 946063.82 | 343.941 |
| GTB2 | 679807.871 | 946063.592 | 343.852 |
| GTB3 | 679820.351 | 946063.132 | 343.882 |
| GTB4 | 679818.551 | 946038.839 | 343.833 |
| GTB5 | 679815.629 | 946038.938 | 343.906 |
| GTB6 | 679815.327 | 946035.605 | 343.982 |

| | | | |
|------|------------|------------|---------|
| GTB7 | 679806.509 | 946036.039 | 343.685 |
| GTB8 | 679807.865 | 946063.589 | 343.178 |
| MQ1 | 679838.087 | 946133.585 | 342.571 |
| MQ2 | 679853.92 | 946131.287 | 342.041 |
| MQ3 | 679849.725 | 946097.686 | 341.591 |
| MQ4 | 679834.275 | 946100.5 | 340.697 |
| MQ5 | 679838.089 | 946133.579 | 339.655 |
| TL6 | 679846.21 | 946139.201 | 331.519 |
| TL7 | 679850.038 | 946138.648 | 332.814 |
| TL8 | 679849.871 | 946136.692 | 332.786 |
| TL9 | 679846.202 | 946136.941 | 331.939 |
| TL10 | 679846.211 | 946139.201 | 331.861 |
| TR1 | 679768.701 | 946124.21 | 331.818 |
| TR2 | 679772.619 | 946093.729 | 331.736 |

| | | | |
|-----|------------|------------|---------|
| TR3 | 679807.852 | 946063.82 | 343.941 |
| TR4 | 679793.091 | 946030.537 | 331.36 |
| TR5 | 679837.931 | 946033.652 | 331.418 |
| TR6 | 679839.881 | 946069.127 | 331.478 |
| SB1 | 679840.578 | 946009.091 | 331.542 |
| SB2 | 679842.739 | 946017.61 | 331.488 |
| RD1 | 679733.439 | 946003.161 | 331.519 |
| RD2 | 679733.748 | 946011.162 | 329.899 |
| RD3 | 679838.041 | 946006.852 | 331.927 |
| RD4 | 679843.285 | 946011.141 | 331.497 |
| RD5 | 679860.225 | 946131.321 | 330.103 |
| RD6 | 679814.447 | 946209.941 | 329.427 |
| RD7 | 679820.475 | 946213.501 | 329.048 |
| RD8 | 679859.029 | 946148.369 | 327.577 |

| | | | |
|------|-------------|-------------|---------|
| RD9 | 679862.731 | 946149.111 | 327.887 |
| RD10 | 679889.64 | 946340.005 | 328.09 |
| RD11 | 679896.425 | 946330.871 | 329.036 |
| RD12 | 679873.388 | 946167.387 | 328.9 |
| RD13 | 679923.27 | 946161.85 | 329.899 |
| RD14 | 680019.278 | 945985.8966 | 328.45 |
| RD15 | 680019.5192 | 945985.8926 | 328.452 |
| RD16 | 680049.2592 | 945985.3466 | 329.851 |
| RD17 | 680052.7984 | 945994.9155 | 330.765 |
| RD18 | 680035.8983 | 945995.2747 | 329.206 |
| RD19 | 680021.1428 | 945998.93 | 329.071 |
| RD20 | 680014.553 | 946000.8285 | 328.984 |
| RD21 | 679998.9224 | 946013.2946 | 328.691 |
| RD22 | 679979.8714 | 946033.5673 | 328.071 |

| | | | |
|------|-------------|-------------|---------|
| RD23 | 679965.4018 | 946049.4666 | 328.419 |
| RD24 | 679958.6616 | 946062.734 | 329.066 |
| RD25 | 679959.5686 | 946094.9526 | 331.567 |
| RD26 | 679960.8124 | 946132.8956 | 332.923 |
| RD27 | 679962.2135 | 946229.3587 | 338.138 |
| RD28 | 679966.6673 | 946409.1306 | 342.532 |
| RD29 | 679931.9204 | 946045.2297 | 327.91 |
| RD30 | 679938.595 | 946053.831 | 328.233 |
| RD31 | 679942.537 | 946052.9746 | 328.123 |
| RD32 | 679948.3344 | 946044.4573 | 327.538 |
| RD33 | 679940.406 | 946045.6251 | 327.73 |